Liquid Color™ 360º, 120VAC

Model Number: LC3-H

Product Description:

10.6” diameter annular RGB LED underwater fixture with 3.5” center opening and 2.6” depth; cast copper housing; tempered fritted lens; 120 volt or input voltage, 126 watt maximum, integral power supply; 10’ Type SEOOW Seoprene cord; RGB array to include power line modem module for DMX interface.

IP68 Rated

Detail:

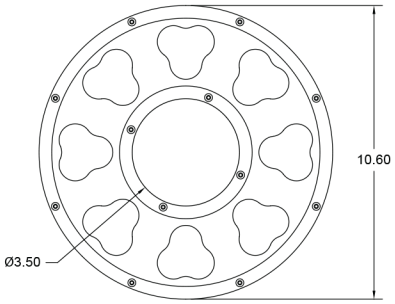

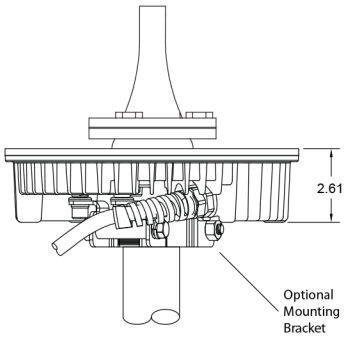

Specification:

Beam Angle Options:	8°, 26°, 46°, 16° x 50° elliptical
Total Lumen Output:	1594 Lumens
Color Range:	16.7 million additive RGB colors: continuously variable intensity
Lumen Maintenance:	70% of full output for 50,000 + hours @ 50° C /122°F
Input Voltage:	120VAC 50/60 Hz
Power Consumption:	126 Watts maximum
Control Interface:	DMX and ArtNet. Integral power line modem module.
Control System:	Fountain People, Inc. controller or third-party DMX or ArtNet controller. (LC Series lights allow for up to 170 lights per DMX universe)
Dimensions:	10.6” outer dia. x 3.5” inner dia. x 2.6” height (269.2 x 88.9 x 66 mm)
Weight:	14 lbs. with 10’ of cable (5.21 kg)
Housing:	Cast Copper. UNS C22000. Thermally efficient. Marine grade.
Lens:	Clear tempered glass with glare and UV screening. Frosted lens optional
Cable Fixture Connection:	Single 10’ (3.05 m), 14-3 SEOOW cord with long life Seoprene sheathing (Standard)
Safety Certifications:	ETL per UL676, FCC, CE, RoHS Compliant
LED Class:	Class 2 LED product
Environment:	Dry / Submerged - IP68 rated
Thermal Protection:	Integral Sensor Protection
Mounting Hardware:	Optional: Niche, Freestanding, Riser, Custom

WINAM CONSTRUCTION CORP
www.winamgroup.com
info@winamgroup.com

Catalog #	
Details	
Project	
Prepared by	
Date	V1.6