

Speedway – Product Specification



HodgePodge – A variety of study and durable sport and play elements

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities.

Climbing trees, a Wasp's nest, Volleyball nets for sporting activities, cable rides for fun and excitement.

At a glance.

Product Family:	HodgePodge	Number of Foundations:	4 pc.
Item Number:	97.110.004	Concrete Volume C20/C25:	6.2 m³ (219.0 ft³)
Children's Age:	5+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.00 m (3'-4")	Installation Time without foundation:	10 hours
Length x Width x Height:	30.2 m x 2.2 m x 3.2 m (98'-11" x 7'-3" x 10'-5")	Dimensions of largest part:	Ø 0.1 x 3.2 m (Ø 0'-4" x 10'-6")
Protective Surfacing Area (DIN EN 1176):	30.2 m x 4.0 m	Weight of heaviest part:	120 kg (264.6 lbs)
Protective Surfacing Area (ASTM 1487):	33.8 m x 5.9 m (110'-11" x 19'-2")	Shipping Volume:	5.3 m³ (187.2 ft³)
Minimum space required DIN EN 1176:	114.0 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	193.6 m² (2,083.9 ft²)	Certificate according to EN 1176:	Nr.: Z2.16.01.10256.247 vom TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin


Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Speedway – Product Specification



M 1:200

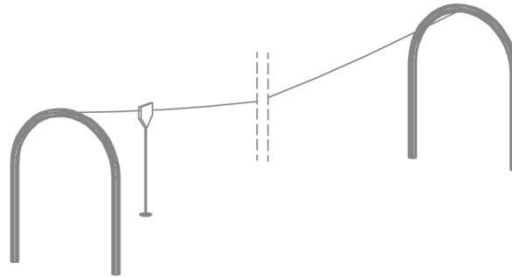

Technische Details.

The following text can also be used for tenders.

Cable:

Ø12 mm (1/2"), 17 x 7 mm (11/16" x 1/4"), similar DIN3069+SE with galvanized wires, for a gentle and durable run of the trolley. Robust tension device connected to both cable ends with turnbuckle M20. Heavy-duty stoppers featuring Polyamide-buffers at steel brackets; end station with rubber buffer and robust compression spring.

Trolley:

Enclosed casing made from stainless steel, safety pendulum seat suspended from coated chain.

Starting- (End-) station:

Arched steel construction with uprights 140 x 12.5 mm (5 1/2" x 1/2") and half-bend tubing 133 x 8.0mm (5 1/4" x 5/16"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.




Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com